

11/21/00

11-22-00

A

Access Mail Label No. EL-658-969-245-US

11/21/00

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.

14093

Total Pages in this Submission

4

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application

Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

WIRELESS KEYBOARD AND INFORMATION PROCESSING DEVICE HAVING THE SAME

and invented by:

YUKIKO KANAZAWA

JC903 U.S. PTO
09/717886
11/21/00

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 27 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.

14093

Total Pages in this Submission

4

Application Elements (Continued)

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☒ Formal Number of Sheets 4
- b. ☐ Informal Number of Sheets _____
4. ☒ Oath or Declaration
- a. ☒ Newly executed *(original or copy)* ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied
under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☒ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail *(Specify Label No.):* EL-658-969-245-US

**UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.

14093

Total Pages in this Submission

4

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*

16. ☒ Additional Enclosures *(please identify below):*

Claim of Priority in due course

Request That Application Not Be Published Pursuant To 35 U.S.C. 122(b)(2)

17. ☐ Pursuant to 35 U.S.C. 122(b)(2), Applicant hereby requests that this patent application not be published pursuant to 35 U.S.C. 122(b)(1). Applicant hereby certifies that the invention disclosed in this application has not and will not be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication of applications 18 months after filing of the application.

Warning

An applicant who makes a request not to publish, but who subsequently files in a foreign country or under a multilateral international agreement specified in 35 U.S.C. 122(b)(2)(B)(i), must notify the Director of such filing not later than 45 days after the date of the filing of such foreign or international application. A failure of the applicant to provide such notice within the prescribed period shall result in the application being regarded as abandoned, unless it is shown to the satisfaction of the Director that the delay in submitting the notice was unintentional.

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.

14093

Total Pages in this Submission

4


Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	16	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	4	- 3 =	1	x \$80.00	\$80.00
Multiple Dependent Claims (check if applicable) <input checked="" type="checkbox"/>					\$270.00
BASIC FEE					\$710.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$1,060.00

- ☒ A check in the amount of \$1,060.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 19-1013 SSMP as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Signature


Paul J. Esatto, Jr.
Registration No. 30,749
Scully, Scott, Murphy & Presser
400 Garden City Plaza
Garden City, New York 11530
(516) 742-4343

Dated: November 21, 2000

CC:

WIRELESS KEYBOARD AND INFORMATION PROCESSING DEVICE
HAVING THE SAME

Background of the Invention:

5 The present invention relates to a wireless
keyboard, an information processing device having the
wireless keyboard as means for input and transmission
level switching system provided therein, particularly to
a wireless keyboard, an information processing device
10 having the wireless keyboard as means for input
provided therein and transmission level switching
system to achieve power conservation considering
usability of users.

Conventionally, wireless keyboards are generally
15 provided as one kind of input devices with respect to
information processing devices as a computer, and the
like. The conventional wireless keyboard has advantages
of requiring no cable connected to the information
processing device and being able to key-input away from
20 the information processing device. However, in some
occasions, an input from a wireless keyboard to an
information processing device is hindered by
communication incapability depending on a relation
between positions of the information processing device
25 and the wireless keyboard. This is a problem raised by an
uncertainty that the user would not know the conditions
of reception level of the keyboard-input in the
information processing device, that is, an uncertainty

09717886-12100

how far the communications is conducted normally or where the position suitable for conducting communications is.

Transmission level of the wireless keyboard for
5 transmitting radio signal, such as infrared rays, radio wave and the like, is kept at a fixed level (the maximum level) at all time regardless of the distance to the information processing device. Accordingly, there is another a problem that undesired electric power is
10 consumed by transmitting radio signal at the maximum level even when the wireless keyboard is placed very close to the information processing device requiring radio signal at lower level.

Among the above-mentioned problems, considering the
15 problem that the user would not know the conditions of the reception level of keyboard-input in the information processing device, one solution is given by an information processing device disclosed in unexamined Japanese Patent Publication No. Hei 11-212706.

20 According to the above-mentioned publication, the information processing device receives data transmitted in the form of radio from a keyboard by a receiving portion therein and processes the data to obtain a sampling value. And the information processing device
25 determines the communication range to the keyboard by comparing the sampling value with several standard reference values and indicates the results by an indicator thereof, for example, short range is indicated

09747886-113100

by green, medium range is indicated by yellow and long range is indicated by red. Accordingly, users can check the current operation range visually.

The information processing device described in the above-mentioned unexamined Japanese Patent Publication No. Hei 11-212706 is capable of indicating the communication range of a short, a medium or a long distance between a wireless keyboard and the information processing device. However, as the indicator is accommodated in the information processing device, there is a problem that the user operating the keyboard away from the information processing device has difficulty in checking the indications visually. And the prior art has not solved the problem of undesired consumption of electricity by transmitting the radio signal at a fixed level (the maximum level) at all time.

Summary of the invention:

It is therefore an object of the present invention to provide a wireless keyboard, an information processing device having the wireless keyboard as means for input therein and transmission level switching system.

Other objects of the present invention will become clear as the description proceeds.

A first wireless keyboard of the present invention is a wireless keyboard in which an input signal input by operation of keys provided on the keyboard is transmitted from a transmitting portion provided in the above-mentioned keyboard to the information processing

09717886-112100

device. In addition, the above-mentioned first wireless keyboard of the present invention is characterized in having a receiving portion for receiving the above-mentioned input-signal from the above-mentioned information processing device at a reception level and transmitting the above-mentioned input-signal at a transmission level by switching in response to the combination of the transmission level of the above-mentioned input-signal transmitted from the above-mentioned transmitting portion and the reception level received in the above-mentioned receiving portion.

A second wireless keyboard of the present invention is a wireless keyboard in which an input signal input by operation of keys provided on the keyboard is transmitted from a transmitting portion provided in the above-mentioned keyboard to the information processing device. And the above-mentioned second wireless keyboard of the present invention is characterized in providing a main body of the above-mentioned keyboard having;

a receiving portion for receiving a reception level of the above-mentioned input-signal from the above-mentioned information processing device,
a transmission level setting portion for storing the reception level of the above-mentioned input-signal transmitted from the above-mentioned transmitting portion and for setting a new transmission level referring to the transmission level setting table

predetermined in response to the combination of the above-mentioned transmission level and the above-mentioned reception level on receiving the reception level from the above-mentioned receiving portion and
5 a transmission level switching portion for receiving the new transmission level set in the above-mentioned transmission level setting portion and for switching the transmission level of the input-signal transmitted through the above-mentioned transmitting portion to a
10 new transmission level.

A third wireless keyboard of the present invention is a wireless keyboard in which an input signal input by operation of keys provided on the keyboard is transmitted from a transmitting portion provided in the
15 above-mentioned keyboard to the information processing device. And the above-mentioned wireless keyboard of the present invention is characterized in providing the main body of the above-mentioned keyboard having;
a receiving portion for receiving the above-mentioned
20 input-signal from the above-mentioned information processing device at a reception level,
a transmission level setting portion for storing the reception level of the above-mentioned input-signal transmitted from the above-mentioned transmitting
25 portion, for setting a new transmission level referring to the transmission level setting table predetermined in response to the combination of the above-mentioned transmission level and the above-mentioned reception

09717886-113100

level on receiving the reception level from the above-mentioned receiving portion and for detecting the distance information to the information processing device referring to the distance information table
5 predetermined in response to the combination of the above-mentioned transmission level and the above-mentioned reception level,

a transmission level switching portion for receiving the new transmission level set in the above-mentioned
10 transmission level setting portion and switching the transmission level of the input-signal transmitted through the above-mentioned transmitting portion to a new transmission level and
a distance information indicating portion for receiving
15 and indicating the above-mentioned distance information.

A fourth wireless keyboard of the present invention is characterized in that the second or third wireless keyboard of the present invention additionally has;
20 a timer for counting a time period from the above-mentioned input-signal is transmitted to the above-mentioned reception level is received by the above-mentioned transmitting portion and for outputting a time-out signal in the event the above-mentioned
25 reception level is not transmitted within a fixed period of time and

a communication incapability indicating portion for indicating the incapability in the communication by

09747886.1.2.1.00

receiving the above-mentioned time-out signal
in the second or the third wireless keyboard of the
present invention.

A fifth wireless keyboard of the present invention
5 is characterized in that the above-mentioned
transmitting setting table in the second, third or forth
wireless keyboard of the present invention is set to
provide the minimum transmission level which the
above-mentioned information processing device can
10 receive and detect at the above-mentioned distance by
each combination of the above-mentioned transmission
level and the above-mentioned reception level by
detecting the distance information to the above-
mentioned information processing device in response to
15 the combination of the above-mentioned transmission
level and the above-mentioned reception level.

A sixth wireless keyboard of the present invention
is characterized in that the second, third or fourth
wireless keyboard of the present invention additionally
20 has an integrated battery and means for switching the
power supply by user's operation to halt the power
supply from the above-mentioned integrated battery to a
designated internal circuit by the above-mentioned
means for switching the power supply under user's
25 operation.

A first information processing device having the
wireless keyboard of the present invention as means for
input is characterized in that the main body of the

information processing device has

a receiving portion for receiving input-signal transmitted from the wireless keyboard,

a reception level detecting portion for detecting and
5 outputting the reception level on receiving the above-mentioned input-signal and

a transmitting portion for transmitting the reception level output from the above-mentioned reception level detecting portion.

10 A second information processing device having the wireless keyboard of the present invention as means for input is characterized in that the above-mentioned transmitting portion transmits the reception level output from the above-mentioned reception level
15 detecting portion in sequence at regular intervals in the first information processing device having the wireless keyboard of the present invention as means for input.

Transmission level switching system of the present invention is characterized in having one of the second
20 through sixth wireless keyboard of the present invention and one of the first or second information processing device of the present invention.

Brief Description of the Drawings:

Fig. 1 is a block diagram for showing the
25 composition of a preferred embodiment of the present invention;

Fig. 2 is a flowchart for showing the operation on a side of a wireless keyboard in a preferred embodiment of

the present invention;

Fig. 3 is a flowchart for showing the operation on a side of a preferred information processing device in an embodiment of the present invention;

5 Fig. 4 is a diagram for illustrating the setting of transmission level in a preferred embodiment of the present invention; and

Fig. 5 is a diagram for illustrating distance information in a preferred embodiment of the present invention.

Detailed Description of the Preferred Embodiment:

Now referring to the drawings, preferred embodiments of the present invention is described.

Fig. 1 is a block diagram for showing the composition of a preferred embodiment of the present invention in which a wireless keyboard 1 and an information processing device 2 as computer, and the like having the wireless keyboard 1 as means for input therein are provided.

20 The wireless keyboard 1 comprises an integrated battery 11 for supplying power to internal circuits in the wireless keyboard 1, a transmitting and receiving portion 12 for transmitting the input data D input by a user through the wireless keyboard 11 and receiving the reception level signal L from a transmitting and receiving portion 21 of the information processing device 2, a timer 13 for counting the time period from the time that the transmitting and receiving portion 12 transmits

the data D until the time that the transmitting and receiving portion 12 receives the reception level signal L and transmitting an alarm signal to an indication LED 17 in the event the reception level signal L is not transmitted within a predetermined period of time, a transmission level setting portion 14 for setting the transmission level by receiving the reception level signal L from the transmitting and receiving portion 21 and for transmitting the distance information with respect to the information processing device 2 according to the relation between the transmission level and the reception level to a LCD indicating portion 16, a transmission level switching portion 15 for transmitting a transmission level switching signal to the transmitting and receiving portion 12 based on the information sent from the transmission level setting portion 14, the LCD indicating portion 16 for indicating the distance information sent from the transmission level setting portion 14 and an indication LED 17 for lighting LED on receiving the alarm signal from the timer 13.

The information processing device 2 comprises the transmitting and receiving portion 21 for transmitting the input data D to the reception level detecting portion 22 by receiving the input data D transmitted from the wireless keyboard 1 and for transmitting the detected level determined at the reception level detecting portion

22 to the wireless keyboard 1 at regular intervals, and the reception level detecting portion 22 for sending the result of determining the reception level of the input data D to the transmitting and receiving portion 21.

5 Next, referring to the Fig. 1 through 4 an operation of a preferred embodiment of the present invention is described in detail. Fig. 2 is a flowchart for showing an operation on a side of the wireless keyboard in a preferred embodiment of the present invention, Fig. 3 is
10 a flowchart for showing an operation on a side of the information processing device in the embodiment of the present invention and Fig. 4 is a view for showing the setting of transmission level in the embodiment of the present invention.

15 At first, the operation on the side of the wireless keyboard is described corresponding to the flowchart of Fig. 2.

 Data input by a user through the keyboard 1 are sent to transmitting buffer which is not shown in the
20 drawings in the transmitting and receiving portion 12 and the transmitting and receiving portion 12 transmits the data D to the information processing device 2 after verifying the data existing in the transmitting buffer. At this time, an initial value of the transmission level
25 switching portion 15 is high and the first transmission is performed at high level accordingly. Incidentally, in the present embodiment, for convenience of an explanation, the transmission level is fixed in three levels of high,

mid and low and the transmission level is receivable and detectable normally in any level on the side of the information processing device 2 in a short range to the wireless keyboard 1 (steps S1 and S2).

5 When the input data D is transmitted to the information processing device 2, the transmitting and receiving portion 12 commands the timer 13 to start counting the time period (step S3).

10 Next, the transmitting and receiving portion 12 verifies the data exists in the receiving buffer which is not shown in the transmitting and receiving portion 12. As will be followed, when the information processing device 2 transmits the data to the wireless keyboard 1, the data is stored in the receiving buffer in the
15 transmitting and receiving portion 12, because the information processing device 2 detects the reception level of the input data on receiving from the wireless keyboard 1 and transmits the reception level signal L back to the transmitting and receiving portion 12 in the
20 wireless keyboard 1 (step S4).

 In step 4, when the data is stored in the receiving buffer, the transmitting and receiving portion 12 commands the timer 13 to reset the previous counting (step S5) and transmits the reception level signal L from
25 the information processing device 2 to the transmission level setting portion 14 (step S6).

 After receiving the reception level signal L, the transmission level setting portion 14 compares the

reception level with the transmission level of the input data D which corresponds to the above-mentioned reception level. Then the transmission level setting portion 14 sets a new transmission level referring to the transmission level setting table (Fig. 4) predetermined in response to the combination of the above-mentioned transmission level and the above-mentioned reception level. The transmission level setting table shown in Fig. 4 is provided in the transmission level setting portion 14.

Incidentally, the above-mentioned transmission level setting portion 14 stores the transmission level of the immediately preceding input data and sets the new transmission level based on the above-mentioned input data and the reception level returned from the information processing device 2 (step S7).

Now, the setting of transmission level by the transmission level setting portion 14 is described referring to Fig. 4.

At first, allowable minimum range for the transmission level and the reception level to be transmitted and received between the information processing device 2 and the wireless keyboard 1 are divided into 3 levels of a short, a medium and a long range according to a relation between the transmission level and the reception level. And the reception level detecting portion 22 determines the transmitting and the reception level to be equal in the event of short range. And the reception level detecting portion determines

that the reception level is one level lower than the transmission level in the event of medium range, for example, the reception level is mid when the transmission level is high, the reception level is low when the transmission level is mid and the reception level is not detectable when the transmission level is low. Further, the reception level is determined two levels lower than the transmission level in the event of the long range, for example, the reception level is low when the transmission level is high and the reception level is not detectable when the transmission level is mid or low.

For one example, the transmission level is high at the initial value and a first input data is accordingly output at high level. Then the information processing device 2 determines the reception level. In the above-mentioned event that the reception level returns to the keyboard 1 at low level, for example, the information processing device 2 sets a new transmission level at high by combining the transmission level at high and the reception level at low as shown in Fig. 4. It is appeared that the range is long according to the reception level being 2 level lower than the transmission level and the transmission level must be high to be detected on the side of the information processing device 2.

And for another example, when the transmission level is high and the reception level is high as shown in Fig. 4, a new transmission level is set at low. It is appeared that the range is short according to the

reception level being equal to the transmission level and transmission at low level is received at low level. Thus, the distance information between the information processing device 2 and the wireless keyboard 1 is
5 detected according to the relation between the transmission level and the reception level. And the allowable minimum transmission level for the information processing device 2 to be received and detected normally is set. Accordingly, it is possible to
10 reduce undesired power consumption by transmitting radio signal at a fixed level (high level).

Next, descriptions are started from the step 8 returning to the flowchart of Fig. 2.

After setting a new transmission level, the
15 transmission level setting portion 14 sends the new transmission level with respect to the transmission level switching portion 15. Then the transmission level switching portion 15 switches the transmission level to a new level sent from the transmission level setting
20 portion 14(step S8).

The transmission level setting portion 14 compares the reception level with the transmission level of the input data D corresponding to the reception level in parallel with the step 8. And referring to the distance
25 information table (Fig.5) predetermined in response to the combination of the above-mentioned transmission level and the above-mentioned reception level, the transmission level setting portion 14 sends an

information which range of short, medium or long is determined between the wireless keyboard 1 and the information processing device 2 according to the relation between the transmission level and the reception level to
5 LCD indicating portion 16 for indicating the distance information thereby. Incidentally, the distance information table shown in Fig. 5 is provided in the transmission level setting portion 14 (step S9).

The transmitting and receiving portion 12
10 transmits a new data input through the wireless keyboard 1 to the information processing device 2 at a level switched in the step 8 (step S10).

Incidentally, in the step 4, when there is no data in the receiving buffer, the timer 13 continues time-
15 counting. And the reason is the wireless keyboard 1 is placed out of the allowable range for communicating and the information processing device 2 can not receive the input data transmitted from the wireless keyboard 1 or the reception level is too low to detect and the reception
20 level signal L can not return to the wireless keyboard 1(step S11).

When there is no data in the receiving buffer within a predetermined fixed time, it is time-out (step S12) and the timer 13 transmits the time-out signal to an
25 indication LED 17 (step S13).

The indication LED 17 lights the LED on receiving the time-out signal. Users recognize the position is out of allowable range for communicating by the indication

LED 17 illuminating. The timer 13 halts the time-out signal on receiving the reception level signal L from the information processing device 2 and also halts the indication of the indication LED 17 (step S14).

5 Next, an operation of the information processing
device 2 is described corresponding to the flowchart of
Fig. 3.

The transmitting and receiving portion 21 detects whether the input data D transmitted from the wireless keyboard 1 exists in the receiving buffer which is not shown in the transmitting and receiving portion 21 (step S21).

In the event the data exists, in the step S21, the data is sent to the reception level detecting portion 22 and the reception level detecting portion 22 determines the reception level of the data sent in three levels of high, mid and low. In the above-mentioned determination, the transmission level and the reception level is determined to be equal in a short range, the reception level is determined to be one level lower than the transmission level in a medium range and the reception level is determined to be two level lower than the transmission level in a long range, as mentioned above. The standard reference value for the determination is also predetermined to obtain the similar result as above. And the reception level detecting portion 22 sends the determined reception level to the transmitting and receiving portion 21 as the reception level signal L (step

S22 through S26).

The transmitting and receiving portion 21 transmits the reception level signal L sent from the reception level detecting portion 22 to the transmitting and receiving
5 portion 12 of the wireless keyboard 1 (step S27).

An embodiment of the present invention has been described above. It is possible to control the power supply with attention to every detail by the transmitting (receiving) level of n (n: natural number) other than
10 three levels. Or it is also possible to arrange the indicating portion for indicating the distance information or out-of-range communications in other portion than LCD/LED and to share the use of indicating portion for both purpose. Further, it is obvious that
15 abnormal conditions (out-of-range communications) can be indicated by means for indication other than illumination.

Though it has been described that the detecting level determined in the reception level detecting portion
20 22 is transmitted from the transmitting and receiving portion 21 to the wireless keyboard 1 at regular intervals, the detecting level can be transmitted to the wireless keyboard 1 on each receiving from the reception level detecting portion 22 by the transmitting and
25 receiving portion 22.

Further, it is possible to extend the driving time of the integrated battery in the wireless keyboard 1 by providing a power supply switching circuit operated by

users and halting the receiving circuit in the transmitting and receiving portion 12 or a circuit for LCD indication on occasion of un-required.

A first effect according to the present invention is to detect the distance information between an information processing device and a wireless keyboard according to the relation of a transmission level with a reception level, to set the allowable minimum transmission level for the information processing device to receive and detect normally at the above-mentioned range. Therefore, it is possible to reduce the consumable power of the wireless keyboard.

A second effect according to the present invention is that the indication became easier to be seen by indicating the distance information between the information processing device and the wireless keyboard on the wireless keyboard and that users can recognize the indication easier during key-operation. Thus, users know how long the wireless keyboard can communicate with the information device easily.

And a third effect according to the present invention is that the determination whether the range between the wireless keyboard and the information device is within or out of the allowable range for conducting communications by providing an indication LED for indicating the out-of-range communications.

What is claimed is:

1. A wireless keyboard for use in transmitting an input signal input by operation of keys thereof to an information processing device, comprising:

transmitting means for transmitting said input signal
5 input by operation of said keys to said information processing device at a predetermined transmission level;
receiving means for receiving a reception level of said input signal from said information processing device;
and

10 said predetermined transmission level of said input signal being switched dependent on a combination of the transmission level of said input signal and the reception level received in said receiving means.

2. A wireless keyboard for use in transmitting an input signal input by operation of keys thereof to an information processing device, comprising:

transmitting means for transmitting said input signal
5 input by operation of said keys to said information processing device at a predetermined transmission level;
receiving means for receiving a reception level of said input signal from said information processing device;

first transmission level setting means for storing the
10 transmission level of said input signal transmitted from said transmitting means and setting a new transmission

00773361400

level with reference to a predetermined transmission level setting table in accordance with a combination of said transmission level and said reception level upon
15 receiving the reception level from said receiving means;
and

transmission level switching means for receiving a new transmission level set by said transmission level setting means and switching the transmission level of the input
20 signal transmitted through said transmitting means into the new transmission level.

3. A wireless keyboard for use in transmitting an input signal input by operation of keys thereof to an information processing device, comprising:
transmitting means for transmitting said input signal
5 input by operation of said keys to said information processing device at a predetermined transmission level;
receiving means for receiving a reception level of said input signal from said information processing device;
second transmission level setting means for storing the
10 transmission level of said input signal transmitted from said transmitting means and setting a new transmission level with reference to a predetermined transmission level setting table in accordance with a combination of said transmission level and said reception level upon
15 receiving the reception level from said receiving means, said second transmission level setting means detecting a distance information between said wireless keyboard and

transmission level switching means for receiving a new
transmission level set by said transmission level setting
25 means and switching the transmission level of the input
signal transmitted through said transmitting means into
the new transmission level; and

4. A wireless keyboard as claimed in claim 2, further comprising:

5. A wireless keyboard as claimed in claim 3, further comprising:

a timer for counting a time period from a first time that said input signal is transmitted from said transmitting means to a second time that said reception level is received by said receiving means and for outputting a time-out signal in the event said reception level is not transmitted within a predetermined time period; and communication failure indicating means for indicating the communication failure upon receiving the time-out signal.

6. A wireless keyboard as claimed in claim 3, wherein said transmission level setting table has a minimum transmission level which is set therein and which can be received and detected normally by said information processing device even in the distance information between said wireless keyboard and said information processing device detected by said second transmission level setting means.

7. A wireless keyboard as claimed in claim 4, wherein said transmission level setting table has a minimum transmission level which is set therein and which can be received and detected normally by said information processing device even in the distance information between said wireless keyboard and said information processing device detected by said second transmission level setting means.

8. A wireless keyboard as claimed in claim 5, wherein said transmission level setting table has a minimum transmission level which is set therein and which can be received and detected normally by said information processing device even in the distance information between said wireless keyboard and said information processing device detected by said second transmission level setting means.

9. A wireless keyboard as claimed in claim 2, further comprising an integrated battery and power supply switching means for switching power supply by an operation of a user, wherein the power supply from said integrated battery to a certain internal circuit is stopped by said power supply switching means by the operation of the user.

10. A wireless keyboard as claimed in claim 3, further comprising an integrated battery and power supply switching means for switching power supply by an operation of a user, wherein the power supply from said integrated battery to a certain internal circuit is stopped by said power supply switching means by the operation of the user.

11. A wireless keyboard as claimed in claim 4, further comprising an integrated battery and power supply switching means for switching power supply by an

operation of a user, wherein the power supply from said
5 integrated battery to a certain internal circuit is
stopped by said power supply switching means by the
operation of the user.

12. A wireless keyboard as claimed in claim 5, further
comprising an integrated battery and power supply
switching means for switching power supply by an
operation of a user, wherein the power supply from said
5 integrated battery to a certain internal circuit is
stopped by said power supply switching means by the
operation of the user.

13. An information processing device having a wireless
keyboard operable as input means, said information
processing device comprising:

a receiving portion for receiving an input signal
5 transmitted from said wireless keyboard;

a reception level detecting portion for detecting and
outputting the reception level upon receiving said input
signal; and

a transmitting portion for transmitting said reception
10 level outputted from said reception level detecting
portion to said wireless keyboard.

14. An information processing device as claimed in claim
13, wherein said transmitting portion transmits said
reception level in sequence at regular intervals.

15. A transmission level switching system comprising a combination of the wireless keyboard as claimed in claim 2 and the information processing device as claimed in claim 13.

0971306-12100

Abstract of the Disclosure:

09717886-14100

A wireless keyboard has a transmitting and receiving portion 12 for transmitting an input data D to an information processing device 2 and receiving a reception level from the information processing device 2, 5 a transmission level setting portion 14 for storing the transmission level of the input data D, setting a new transmission level referring to the transmission level setting table in response to the combination of the stored transmission level and the reception level on receiving 10 the reception level and detecting a distance information with respect to the information processing device 2 referring to a distance information table, a transmission level switching portion 15 for switching the transmission level of the input data D to a new transmission level, an 15 LCD indicating portion 16 for receiving and indicating the distance information, a timer 13 for output a time-out signal in the event the reception level is not transmitted even a fixed period of time passed after the input data D is transmitted and an indication LED 17 for 20 indicating the communications failure by receiving the above-mentioned time-out signal.

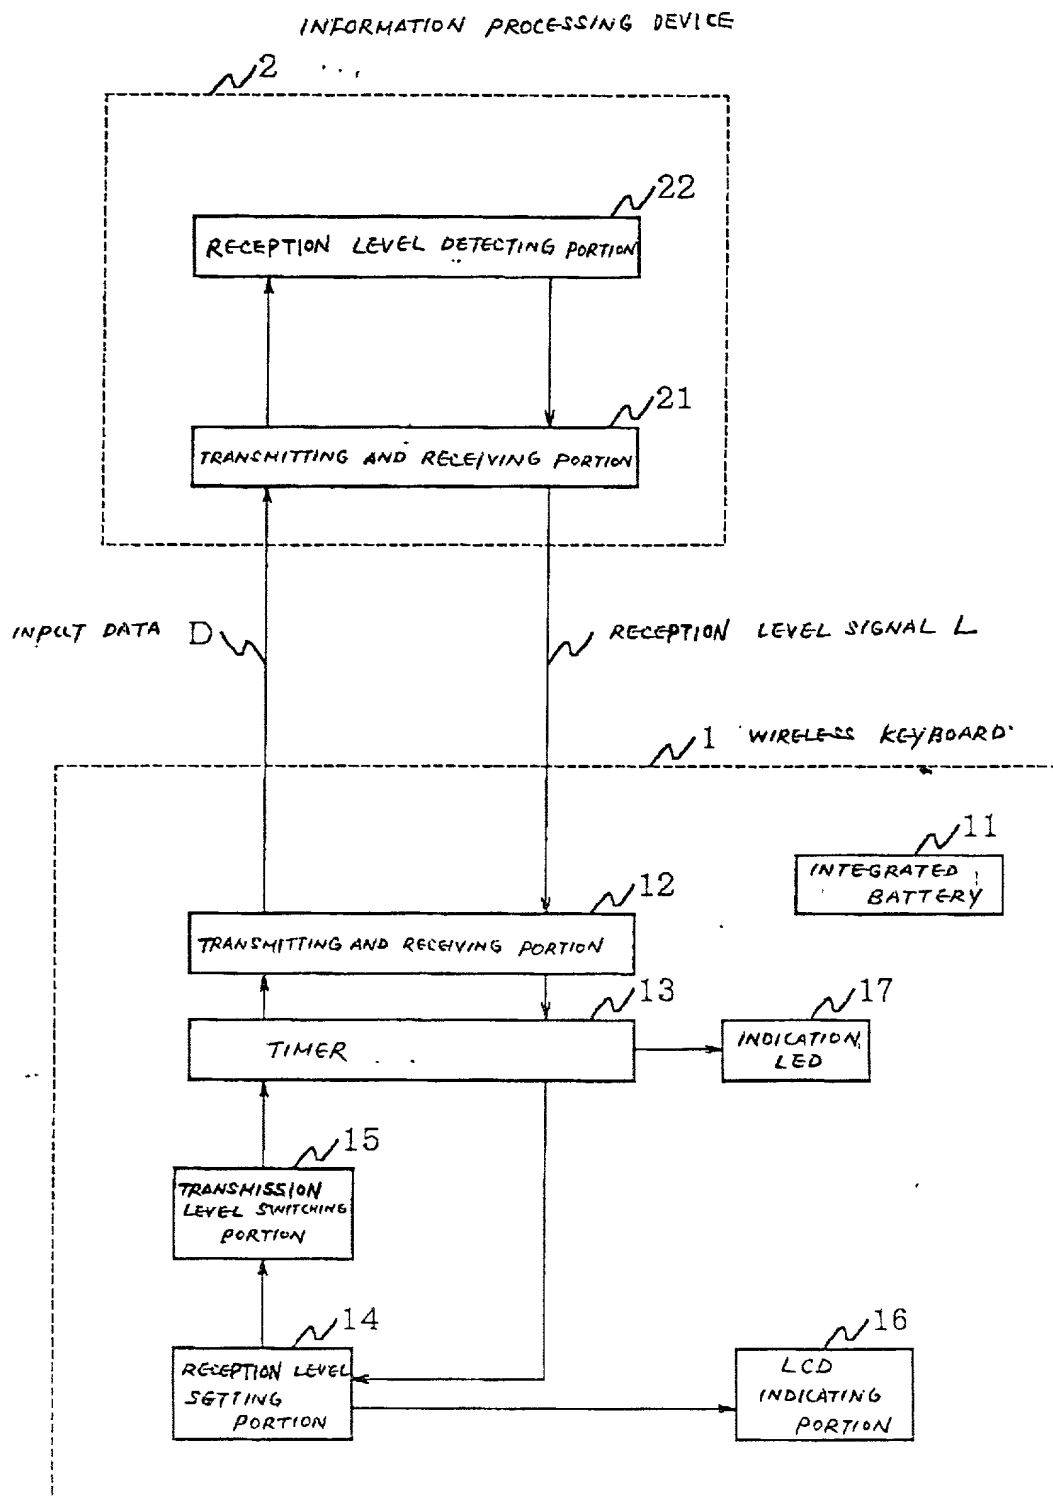


FIG 1

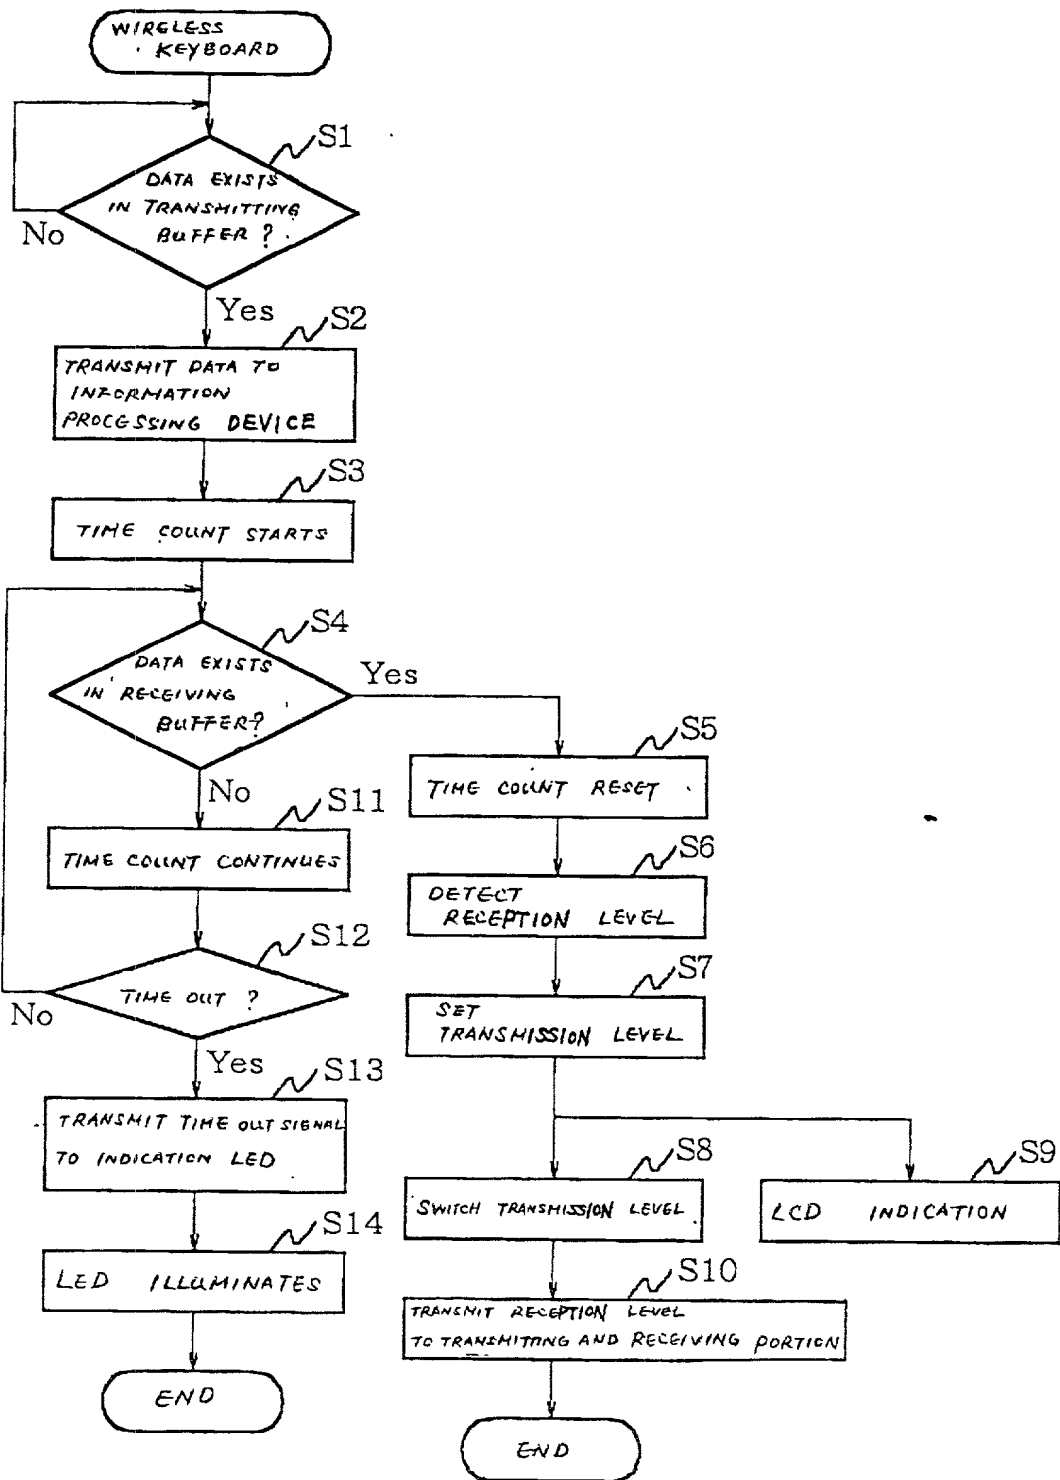


FIG 2

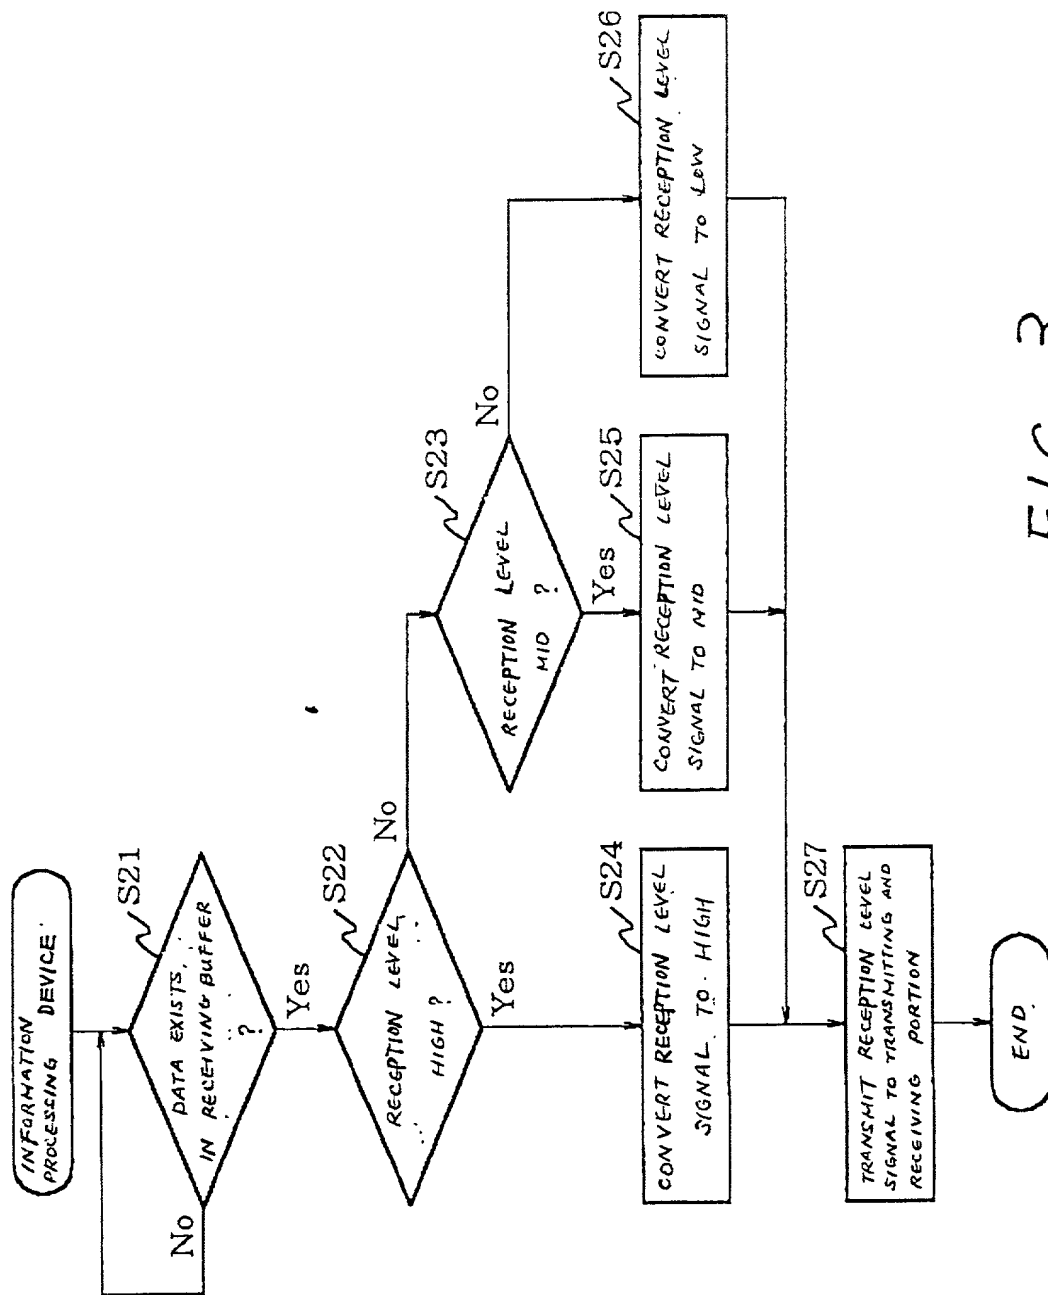


FIG 3

RECEPTION LEVEL TRANSMISSION LEVEL	HIGH	MID	LOW
HIGH	LOW	MID	HIGH
MID		LOW	MID
LOW			LOW

TRANSMISSION LEVEL	RECEPTION LEVEL	DISTANCE INFORMATION
HIGH	HIGH	SHORT DISTANCE
	MID	MEDIUM DISTANCE
	LOW	LONG DISTANCE
MID	HIGH	SHORT DISTANCE
	MID	MEDIUM DISTANCE
LOW	LOW	LONG DISTANCE

FIG 5

Docket No.

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

WIRELESS KEYBOARD AND INFORMATION PROCESSING DEVICE
HAVING THE SAME

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on _____ as United States Application No. or PCT International
Application Number _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

<u>11-331327</u>	<u>Japan</u>	<u>22/11/1999</u>	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	
<u> </u>	<u> </u>	<u> </u>	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	
<u> </u>	<u> </u>	<u> </u>	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

Stephen D. Murphy, Reg. No.: 22,002

Paul J. Esatto, Reg. No.: 30,749

William C. Roch, Reg. No.: 24,972

Mark J. Cohen, Reg. No.: 32,211

Frank S. DiGiglio, Reg. No.: 31,346

Donald T. Black, Reg. No.: 27,999

Send Correspondence to: Paul-J. Esatto, Jr.
Scully, Scott, Murphy & Presser
400 Garden City Plaza
Garden City, New York 11530

Direct Telephone Calls to: *(name and telephone number)*
Paul J. Esatto, Jr. (516) 742-4343

Full name of sole or first inventor	YUKIKO KANAZAWA	
Sole or first inventor's signature	<i>Yukiko Kanazawa</i> (金澤)	Date November 20, 2000
Residence	Gunma, Japan	
Citizenship	Japan	
Post Office Address	c/o NEC Gunma, Ltd., 32, Nishiyajima, Ohta-shi, Gunma, Japan	

Full name of second inventor, if any	
Second inventor's signature	Date
Residence	
Citizenship	
Post Office Address	